

The NAVALIBER B-15 classified high noise reduction system is made of two NAVALIBER-ISOLIBER standard wall panels, one of 25 mm thickness and the other 50 mm thick, between them we keep an air gap of 20 mm. Total thickness of this system is 95 mm.

The core of each panel is a high-density rock wool, lined on both sides by a 0,7 mm thickness galvanized sheet finished with a decorative low flame spread PVC foil on both visible faces. Colours according with project.

The system is completed with all the necessary profiles for the installation.


Global noise reduction of NAVALIBER 25+50 noise reduction system is: **Rw = 46 dB.**

25+50 noise reduction system



TECHNICAL FEATURES	25+50 noise reduction system
Linings	0,7 mm
Standard finishing	150 µm PVC film
Insulation	rock wool
Max. length	2500 mm
Standard width	600-935 mm
Thickness	95 mm
Weight	35 kg/m ²
Noise reduction	46 dB ⁽¹⁾
Classification	B-15

PG-15 Galvanized support profile

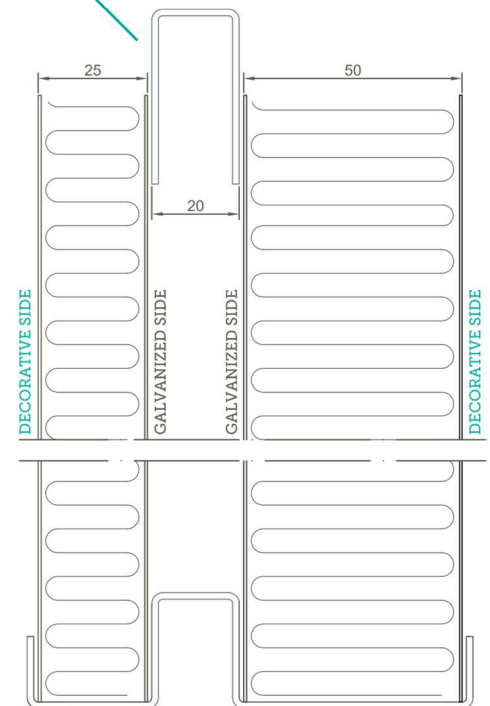

PG-14 Galvanized support profile

¹ According to acoustic test ref. CTA 017/07/AER and method of test UNE-EN ISO 140-3:1995.